

## Aquia® IV Close Coupled Toilet, 1.28 & 0.8 GPF

### FEATURES

- DYNAMAX TORNADO FLUSH® utilizes 360° cleaning power to reach every part of the bowl
- Ultra high-efficiency dual flush 1.28 & 0.8 GPF (4.8 & 3.0 LPF)
- CEFIONTECT® ceramic glaze prevents debris and mold from sticking to ceramic surfaces
- Design of the bowl reduces water flow resistance resulting in a quieter flushing sound
- Completely skirted design for a sleek and understated look that's easier to clean
- Elongated front bowl and tank set, less toilet seat
- Chrome push-button
- 12" Rough-in

### MODELS

- CST446CEMG (#01)  
With CEFIONTECT ceramic glaze

### COMPONENTS

- CT446CUG  
Elongated bowl with CEFIONTECT
- ST446EMA  
Tank and cover only

#### Optional Components

- SS114  
SoftClose® Seat
- SS124  
SoftClose Seat
- SS234  
SoftClose Seat
- TSU08W.10  
10" Unifit Rough-In
- TSU08W.14  
14" Unifit Rough-In
- 9AU321-A  
WASHLET® adapter  
(Required for WASHLET installation)

### COLORS/FINISHES

- #01 Cotton



-  DYNAMAX TORNADO FLUSH
-  Skirted Design
-  CEFIONTECT

### PRODUCT SPECIFICATION

The two-piece, ultra high-efficiency, DYNAMAX TORNADO FLUSH toilet shall be dual flush 1.28 GPF/0.8 GPF. Toilet shall be coated with CEFIONTECT, elongated front bowl, high profile tank, complete skirted bowl and chrome push-button. Toilet shall be TOTO Model CST446CEMG.

### CODES/STANDARDS

- Meets and exceeds ASME A112.19.2/CSA B45.1, ASME A112.19.14
- Certifications: IAPMO(cUPC®), EPA WaterSense, State of Massachusetts, and others
- Code Compliance: UPC, IPC, NSPC, NPC Canada, and others
- Legislative Compliance: California Green Building Code, City of Los Angeles Water Efficiency Ordinance, and others
- Complies with CA Prop 65 warning requirements



# CST446CEMG


## Aquia® IV Close Coupled Toilet, 1.28 & 0.8 GPF

### SPECIFICATIONS

<b>Water Use</b>	1.28 & 0.8 GPF (4.8 & 3.0 LPF)
<b>Flush System</b>	DYNAMAX TORNADO FLUSH®
<b>Min. Water Pressure</b>	8 psi (Flowing)
<b>Water Surface</b>	5-5/8" x 4-1/8"
<b>Trap Diameter</b>	2-1/2"
<b>Rough-in</b>	12" (10" & 14" Optional)
<b>Trap Seal</b>	2-1/8"
<b>Warranty</b>	One Year Limited Warranty
<b>Material</b>	Vitreous China
<b>Shipping Weight</b>	CT446CU(G) 85 lbs ST446EMA 29 lbs
<b>Shipping Dimensions</b>	CT446CU(G) 30-3/4" L x 17-3/8" W x 20-1/2" H ST446EMA 17-1/4" L x 7-7/8" W x 17-1/2" H


### INSTALLATION NOTES

Back-to-Back Toilet Installations:  
TOTO recommends the use of a nationally listed, double sanitary tee-wye only, in vertical waste stacks, in accordance with the stipulations noted in the majority of nationally recognized plumbing codes.

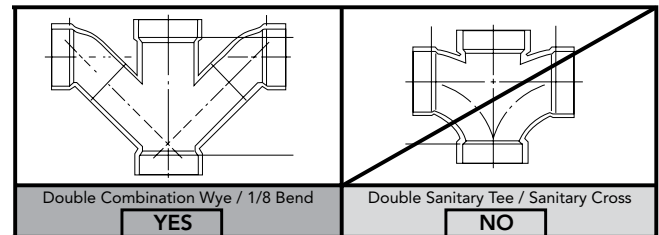

To maintain adequate wall gap between the back of the tank and wall, mount the floor flange at a nominal 12" rough-in distance.

### DIMENSIONS

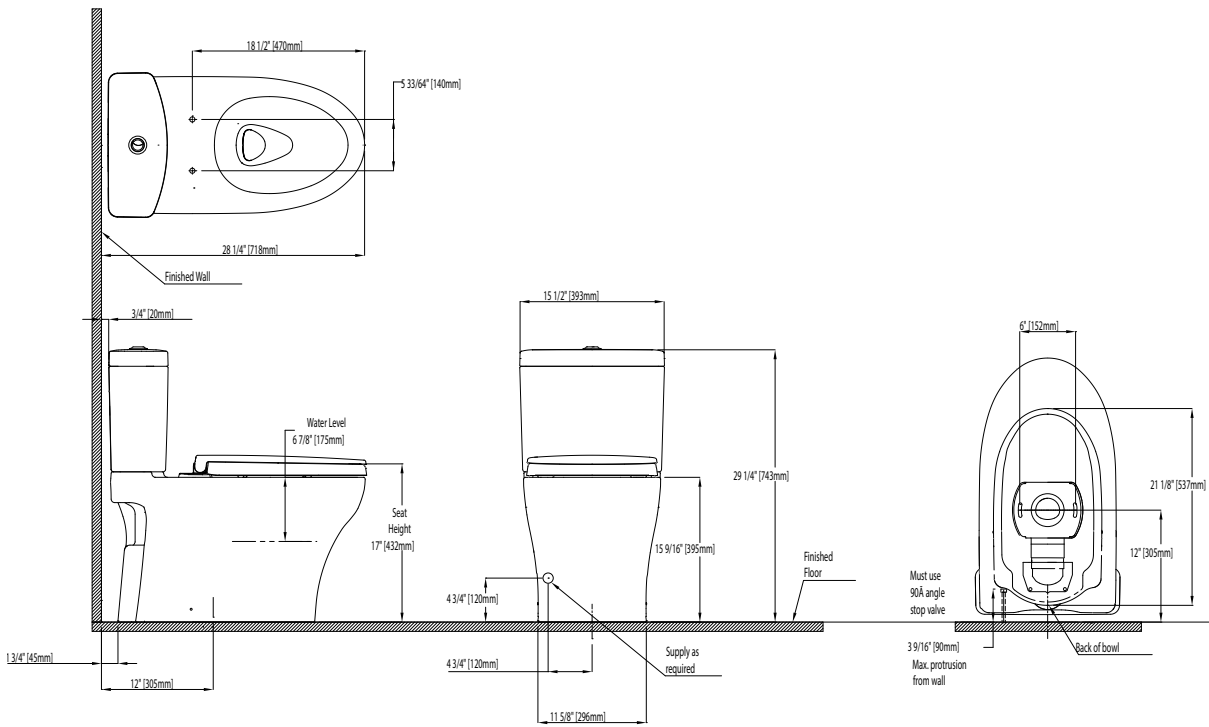

**TOTO**®

*These dimensions and specifications are subject to change without notice*